


HIGH-FREQUENCY CURRENT SWITCHING RELAY

Patent number: JP1117227
Publication date: 1989-05-10
Inventor: TACHIBANA KATSUMI; others: 01
Applicant: MATSUSHITA ELECTRIC WORKS LTD
Classification:
- international: H01H51/32
- european:
Application number: JP19880241705 19880927
Priority number(s):

BEST AVAILABLE COPY**Abstract of JP1117227**

PURPOSE: To improve the high-frequency property by installing contact terminals, contact springs, and a card in a shield case, making a projection piece furnished projecting at the center piece of the card projected from a cutting of the shield case, and driving the projection piece by an armature.

CONSTITUTION: Contact terminals 5a, 5b, and 5c, contact springs 4a and 4b, and a card 1 are installed inside a shield case 6 which consists of a metal plate. A projection piece 7 furnished projecting from the center piece 3 of the card 1 is projected from a cutting 8 furnished at the rear side of the case 6. When an electromagnet unit 12 is excited, one end of an armature 9 is absorbed to the electromagnet unit 12, the projection piece 7 is pressed forward by the armature 9, the card 1 slides forward, and a contact spring 4b connects the COM contact terminal 5b and the NO contact terminal 5c. By connecting an earth connection terminal 10 to the earth in such a condition, the floating capacities between the contact terminals 5a, 5b, and 5c are made smaller, and the high-frequency property can be improved.

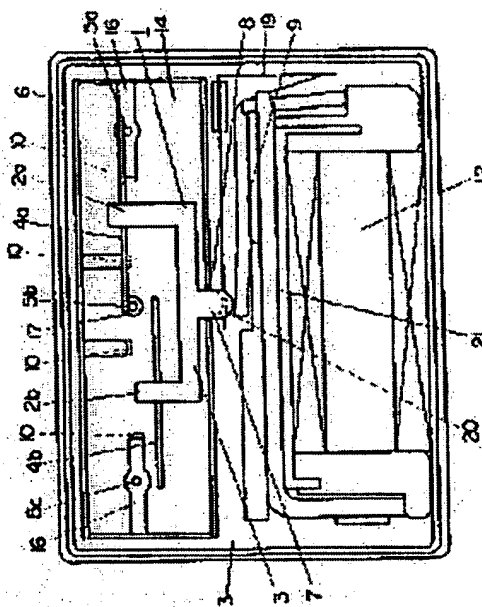

Data supplied from the esp@cenet database - Patent Abstracts of Japan